




A4 Vision

Application for Vision

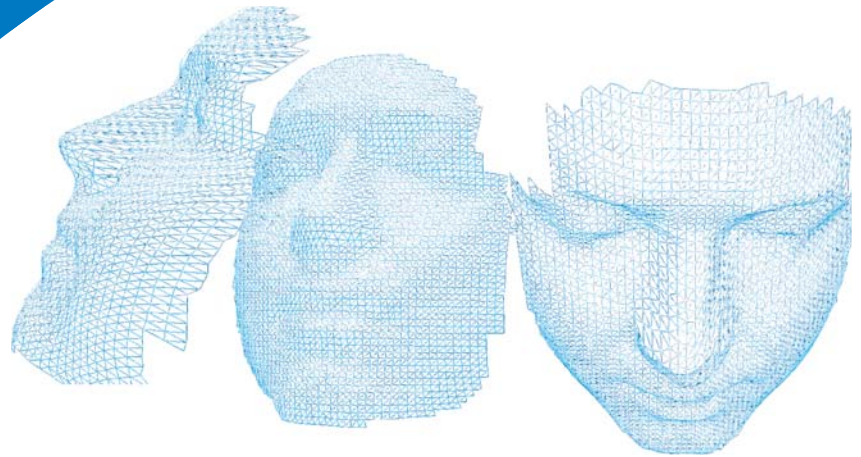

VISION ACCESS - 3D FACE READER

A4Vision develops advanced identification solutions using breakthrough 3D face recognition technology. Through innovations in 3D data capturing and processing capabilities, these systems permit industry-leading accuracy in real-time facial recognition and tracking.

The Vision Access 3D face reader is commonly used to control physical access to buildings and entrances. The reader was designed for quick and easy user positioning which optimizes throughput at entrances. To accomplish this an LCD and audio feedback have been integrated into the design. This makes it very simple for the user to get into the correct position for the reader to quickly capture the optimal image.

3D Technological Advantages

Invariance to light: Using near-infrared range and direct ground-based measurements available from 3D images, our imaging solutions are more tolerant to ambient light conditions, independent from background color, facial make-up, and accessories.

Invariance to angles: Real-time video feed exploits the richness of 3D parameters, performing recognition with full head motion of up to 30° degrees each direction.

3D Image Uniqueness: The richness of extracted facial measurements and data points is sufficient to distinguish between identical twins.

Processing Speed and Accuracy: Proprietary 3D bio-algorithms perform real-time video face capture, and calculation at rates exceeding 30 frames per second. Processing speeds of 10-12 full capturing-matching cycles per second allow for extremely low False Rejection Rates (FRR), even when the False Acceptance Rate (FAR) is set close to zero (.0001), proving A4 is the industry leader in processing and accuracy.





FACE READER SPECIFICATIONS

Power

Face Reader - 10-62 VDC 4A max (20 watt max)
FR Controller – 100 to 250V (750 watt max)

Verification Time

Less than 1 second

Identification Time

Less than 1 second

Relay Contacts:

N/A

Monitor Inputs

N/A

Indication

Status LEDs / 4in. LCD

Termination

Removable screw Terminal Blocks

Wiring Requirements

Reference Install Manual for detail on wiring.

Reader Data Inputs

- Wiegand (data 1/data 0)
- Serial (For contactless smartcards)
- Clock/Data

Dimension

5.19"W x 13.95"H x 4.57"D
(132 x 355 x 116mm)

Weight

50 oz (1.4kg)

Operating Temperature

50° F to 104°F (10°C to 40°C)

Humidity

15% to 65% (Indoor use only)

