

TH17V3511-34

- Cost effective lens for high volume application
- Designed for uncooled IR sensors
- Optimized for the 8-12 μ m wavelength range




Property	Value	Remarks
Optical		
Focal Length	35.0mm	
F/#	1.1	
Horizontal Filed of View	17.7°(A) / 13.0°(B)	
Image Circle	13.6mm	
Back Focal Length	13.2mm	include window
Focus Adjustment	Manual	
Lens transmission (average)	0.74	wavelength8-12 μ m
Coating Type	AR Coating*1	wavelength8-12 μ m
Mechanical		
Weight	94g	
Lens Mount	Threaded	M34×0.5(Pitch)[mm]
Environmental		
Operating Temperature	-40°C to +80°C	Athermalized

*1 Environmental Test (MIL-F-48616)


Adhesion	Tape Test
Humidity	85°C/95%X1000h
Abrasion	Severe 20 stroke
Temperature Shock	-40°C to 100°CX1000cycle
High/Low Temperature	100°CX750h/-57°CX570h

Type	Pitch	Pixels
A	17 μ m	640x480 (VGA)
B	25 μ m	320x240 (QVGA)

MTF

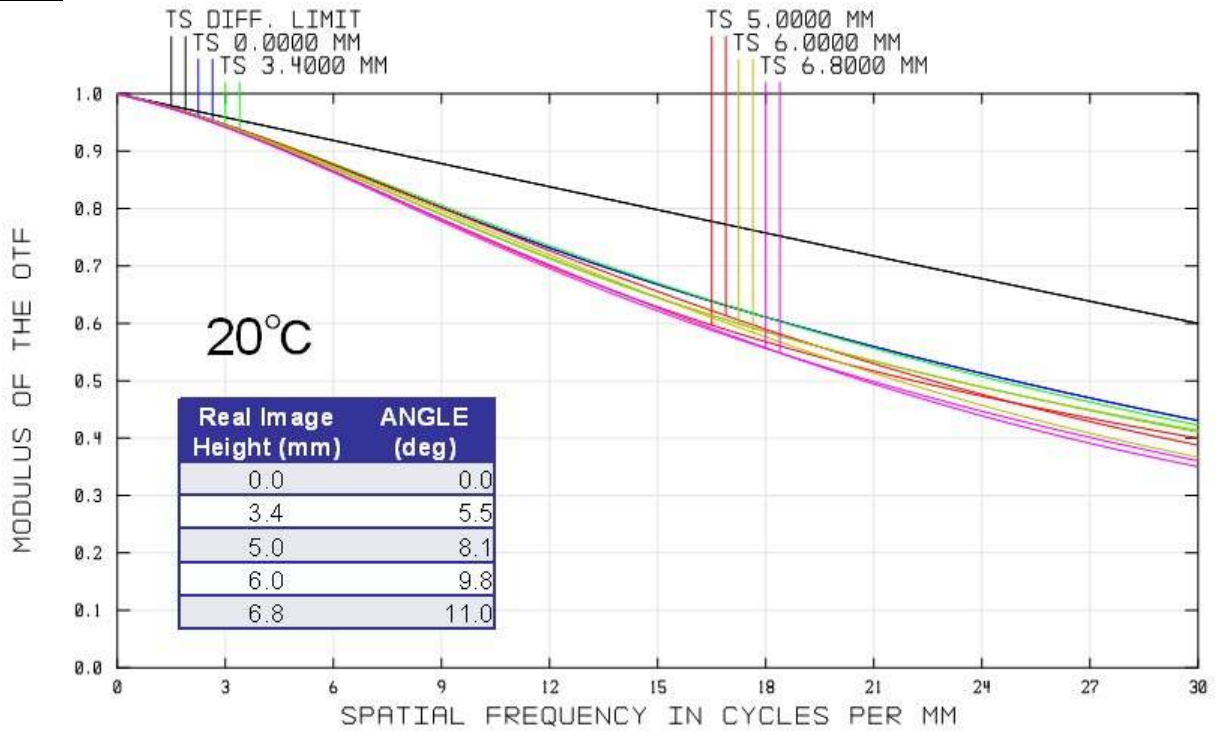

Dimensions

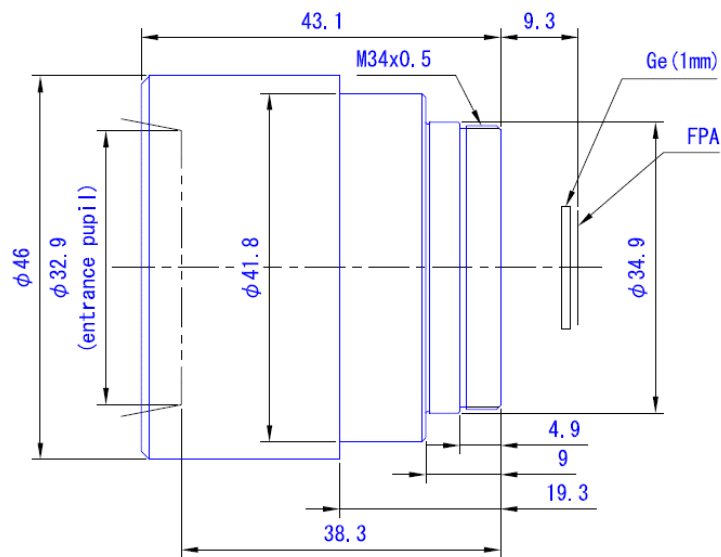

Specification is subject to change without notice

Specification is subject to change without notice.

Premier Electronics Ltd

The Old Building, Bishops College, Cheshunt, Herts EN8 9XH

Tel 01992 637 211 sales@premierelect.co.uk www.premierelect.co.uk